





American Gothic Elm

Our native Elm has been decimated over the last century by Dutch Elm Disease, but we still find Grey and Red Elm when we salvage old barns, making our reclaimed Elm something rare and special. With a delicate and distinctive grain, along with cool and creamy colors, this species looks stunning in any setting—classic to contemporary. Like most reclaimed hardwoods, you can expect occasional nail holes, insect marks, and small dark knots.

TGMBVE (Tongue and Groove Micro-Bevel Edge)

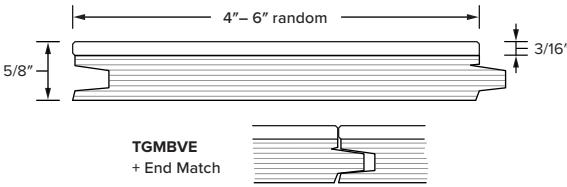

TGSQE (Tongue and Groove Square Edge)

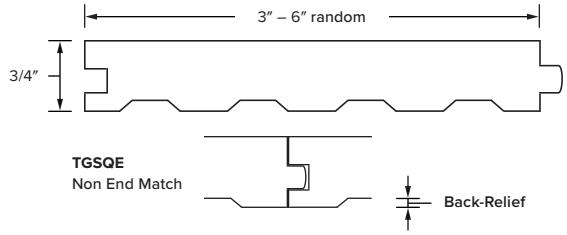

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

MATERIALS

Product:	American Gothic Elm	
Collection:	Reclaimed	
Species:	Reclaimed Elm	
Core:	9-Ply FSC® Certified & TCSA Compliant Birch Plywood	
Texture:	Smooth Planed	
Source:	Agricultural Deconstruction	
Color:	Tones may range from cream to brown. <i>Unlimited color variation is inherent to the product.</i>	
Finish:	Available in Naked and Pure	
Hardness:	750 <i>(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)</i>	
DIMENSIONS & MILLING		
Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)	TGSQE (Tongue and Groove Square Edge)
Type:	Engineered (Prefinished)	Solid (Unfinished)
Thickness:	5/8"	3/4"
Width:	4"-6" random <i>wider widths may be available upon request</i>	3"-6" random <i>wider widths may be available upon request</i>
Length:	18"-12' random	18"-12' random
Wear Layer:	3/16"	N/A
Core:	1/2"	N/A
Back Relief:	N/A	Included

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In engineered prefinished product voids up to 1" in diameter will be filled with a black composite
Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6-9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)
Engineered
FSC Mix Credit
Solid
FSC Recycled 100%


Greenguard Gold Certified

Finishes with Greenguard Gold Certified Label Only

MRc3: Low-Emmitting Materials (Greenguard Gold)
MRc4: Building Product Selection and Procurement
(FSC Mix Credit / FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.

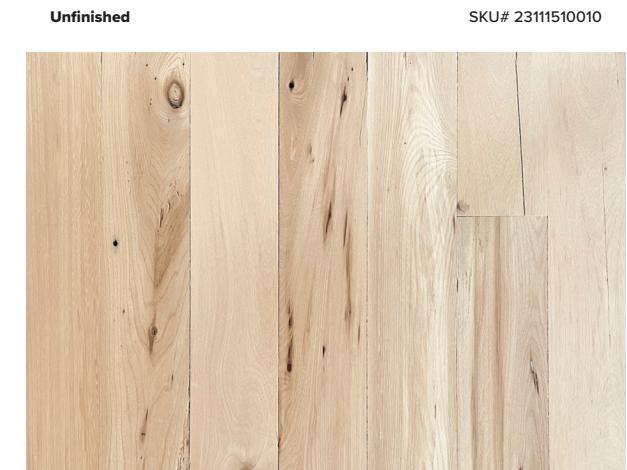

SKU# 23111510111



SKU# 23111510211