




American Gothic Hickory

Dramatic contrasting knots and sapwood are the hallmarks of our reclaimed Hickory, typically salvaged from barns. It's the hardest of our domestic species and wears superbly. Expect chocolate and vanilla color tones, swirling grain, limited nail holes, and occasional insect marks that create a distinctive pattern.

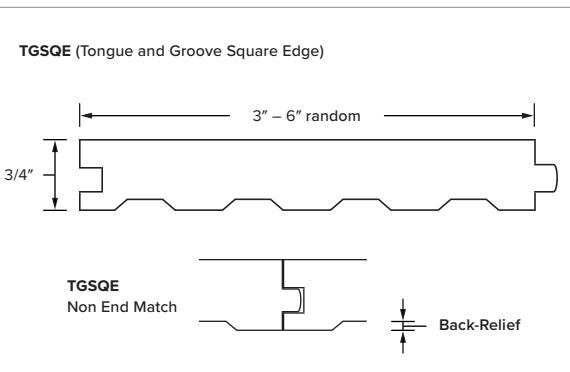

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Gothic Hickory
Collection: Reclaimed
Species: Reclaimed Hickory
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from cream to brown.
Unlimited color variation is inherent to the product.
Finish: Available in Naked and Pure.
Hardness: 1820
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile: TGSQE (Tongue and Groove Square Edge)
+ End Match:
Back-Relief: Included
Thickness: 3/4"
Width: 3" – 6" random
Wider widths may be available upon request
Length: 18" – 12' random
Back Relief: Included

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: Surface should generally be 95% clear of saw marks or patina.
Voids: In prefinished product voids up to 1" in diameter will be filled with a black composite
Insect marks, including pinholes, may also be present on the surface.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC® Recycled 100% (GFA-COC-008489)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
For on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13111610010



Naked

SKU# 13111610111



Pure

SKU# 13111610211