




## American Gothic White Oak

Coveted for its durability and stunning grain patterns, our reclaimed White Oak is salvaged from agricultural and industrial structures. Tightly grained and featuring warm honey to caramel tones, this quintessential American species has just the right amount of character from its previous life to work perfectly in any setting.

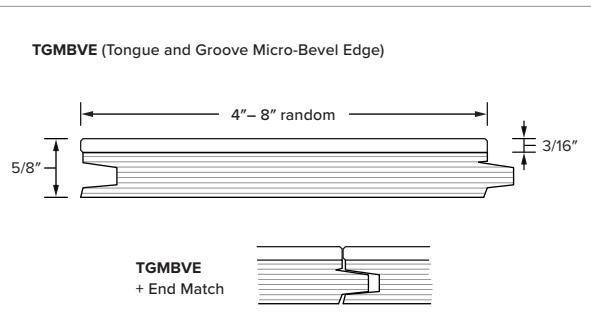

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

Product: Settlers' Plank Chestnut  
Collection: Reclaimed  
Species: Reclaimed White Oak  
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
Texture: Smooth Planed  
Source: Agricultural Deconstruction  
Color: Tones may range from tan to brown.  
*Unlimited color variation is inherent to the product.*

Finish: Available in Naked and Pure.

Hardness: **1360**

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Profile + End Match: **TGMBVE** (Tongue and Groove Micro-Bevel Edge)  
Wear Layer: **3/16"**  
Core: **1/2"**  
Thickness: **5/8"**  
Width: **4"-8" random**  
Length: **18"-12' random**

### ADDITIONAL INFORMATION

Heartwood: No Restriction  
Grain: No Restriction  
Knots: No limitations on sound knots.  
*Surface defects from chipped or open knots may be present.*  
Texture: Surface should generally be 95% clear of saw marks or patina.  
Voids: Voids up to 1" in diameter will be filled with a black composite.  
*Insect marks, including pinholes, may also be present on the surface.*


Discoloration: Ferrous staining from previous fasteners may be present.  
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
Moisture Content: Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)  
**Greenguard Gold Certified**  
MRc3: Low-Emmiting Materials (Greenguard Gold)  
MRc4: Building Product Selection and Procurement  
*(FSC Mix Credit)*

### INSTALLATION RECOMMENDATIONS


Overage: **Minimum 10% additional material**  
*for on-site grading, trimming and installation factors.*  
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*

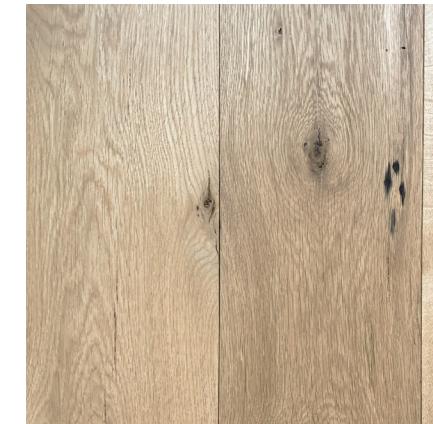

Unfinished



SKU# 23112110010

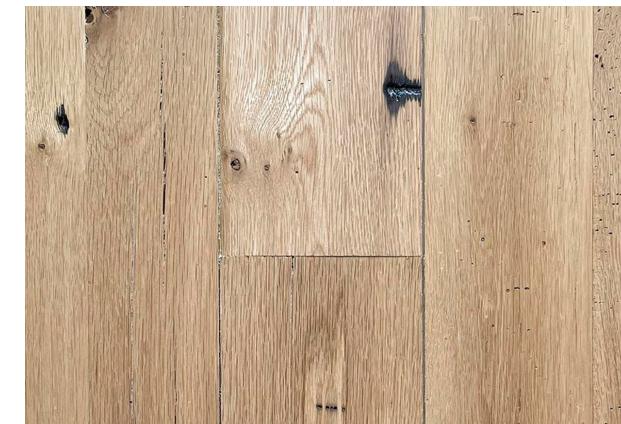

Naked

SKU# 23112110111



Pure



SKU# 23112110211