


SKU# 13492710017

American Prairie Mushroom Board

Our American Prairie Mushroom Board makes use of wood that is salvaged from mushroom growing facilities along the East Coast. This material features rich tones and a variety of original textures: band sawn, circle sawn, and lightly sculpted. Its wide width and long lengths make this reclaimed wood an ideal option for siding, ceiling and wall paneling.

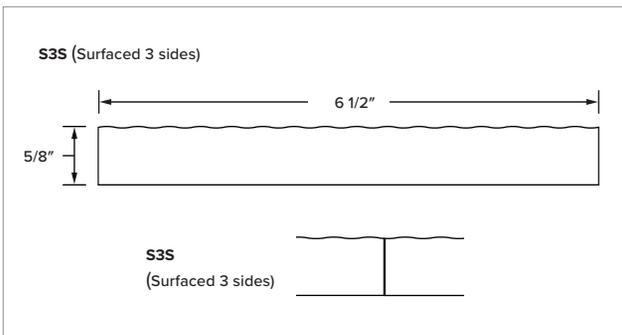

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 05 55—Reclaimed Wood Products & Materials
06 42 00—Wood Paneling
07 46 23—Wood Siding

MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

MATERIALS

Product: American Prairie Mushroom Board
Collection: American Prairie
Species: Reclaimed Softwoods
Texture: Original Patina
Source: Agricultural Deconstruction
Color: Tones may range from tan to brown.
Unlimited color variation is inherent to the product.
Finish: Unfinished unless specified otherwise.
Hardness: 420–1100

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile + End Match: S3S (Surfaced 3 sides)
Thickness: 5/8"
Width: 6 1/2"
Length: 4'– 12' random

ADDITIONAL INFORMATION

Heartwood: No restriction
Grain: No restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures. Overwood of up to 1/4" can be expected.
Voids: Fastener holes and open knots can be present and may reach 2" in diameter. Larger voids are occasionally included to preserve long lengths.
Surface defects from insect marks, including pin holes may be present.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Recycled 100% (GFA-COC-008489)
MRc3: Low-Emitting Materials (Unfinished Wood)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: **Minimum 15%** additional material
For on-site grading, trimming and installation factors.
Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.