



## Black & Tan

This reclaimed mix of Domestic Oak features hints of its original non-toxic black paint from its previous life as horse farm fencing deep in the grain and fissures of the smooth planed surface. An exciting blend of warm tones with varying lights and darks, you'll find occasional knots and a modest price point on these single width reclaimed planks.

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

Product: Black & Tan Reclaimed Oak  
Collection: Reclaimed  
Species: Reclaimed Oak  
Texture: Smooth Planed  
Source: Agricultural Deconstruction  
Color: Tones may range from tan to pink.  
*Unlimited color variation is inherent to the product.*

Finish: Unfinished

Hardness: **1290 - 1360**

*(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Profile + End Match: **TGSQE** (Tongue and Groove Square Edge)  
Back-Relief: Included  
Thickness: **3/4"**  
Width: **3 3/4" face**  
Length: **12" - 6.5' random**  
*(At least 20% of each order will be the longest length in the range)*  
*Called lengths available*

### ADDITIONAL INFORMATION


Heartwood: No Restriction  
Grain: No Restriction  
Knots: No limitations on sound knots.  
*Surface defects from chipped or open knots may be present.*  
Texture: Surface should generally be 95% clear of saw marks or patina.  
Voids: Nail holes and open knots can be present and may reach 1/2" in diameter. Larger voids may be included in longer planks.  
Discoloration: Ferrous staining from previous fasteners may be present.  
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
Moisture Content: Kiln dried 6-9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Recycled 100% (GFA-COC-008489)  
MRc3: Low-Emitting Materials (Unfinished Wood)  
MRc4: Building Product Selection and Procurement  
*(FSC Recycled 100%)*

### INSTALLATION RECOMMENDATIONS

Overage: **Minimum 10% additional material**  
*For on-site grading, trimming and installation factors.*  
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*

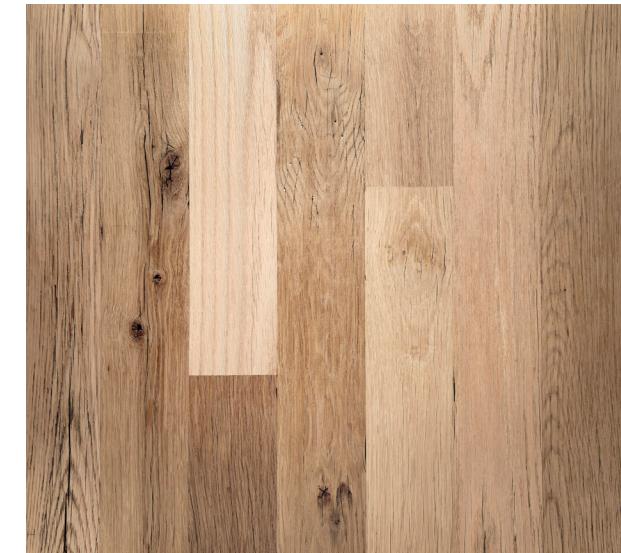

Unfinished

SKU# 13121810010

