



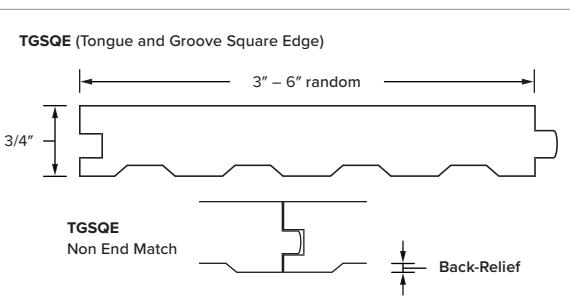

## Character Select Heart Pine

Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. Our Character Select grade offers lively grain variation, knots, nail holes, swirling colors—durability, character, and history in one.

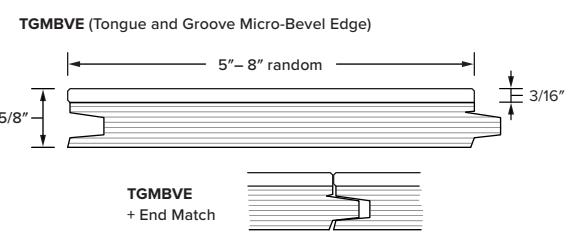

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

### MATERIALS

Product: Character Select Heart Pine  
Collection: Reclaimed  
Species: Reclaimed Southern Yellow Heart Pine  
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
Texture: Smooth Planed  
Source: Agricultural Deconstruction  
Color: Tones may range from yellow to amber.  
*Unlimited color variation is inherent to the product.*  
Finish: Available in Naked and Pure  
Hardness: 1200  
*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)	<b>TGSQE</b> (Tongue and Groove Square Edge)
Type:	Engineered (Prefinished)	Solid (Unfinished)
Thickness:	5/8"	3/4"
Width:	5"- 8" random <i>wider widths may be available upon request</i>	3"- 6" random <i>wider widths may be available upon request</i>
Length:	18"- 12' random	18"- 12' random
Wear Layer:	3/16"	N/A
Core:	1/2"	N/A
Back Relief:	N/A	Included

### ADDITIONAL INFORMATION

Heartwood: 70% or greater heartwood content  
Grain: No restriction  
Knots: No limitations on sound knots.  
*Surface defects from chipped or open knots may be present. Knots typically should not exceed 2" in diameter.*

Texture: Surface is fully planed and clear of saw marks and patina.

Voids: In prefinished product, voids up to 1" in diameter will be filled with a black composite.  
*Insect marks, including pinholes, may also be present on the surface.*

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.


### CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)  
  
**Engineered** FSC Mix Credit      **Solid** FSC Recycled 100%

MRc4: Building Product Selection and Procurement  
*(FSC Mix Credit / FSC Recycled 100%)*


### INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material for on-site grading, trimming and installation factors.  
  
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*

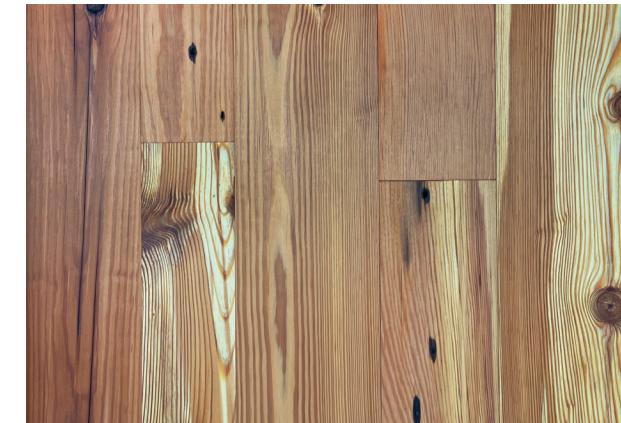


Unfinished

SKU# 23172310010

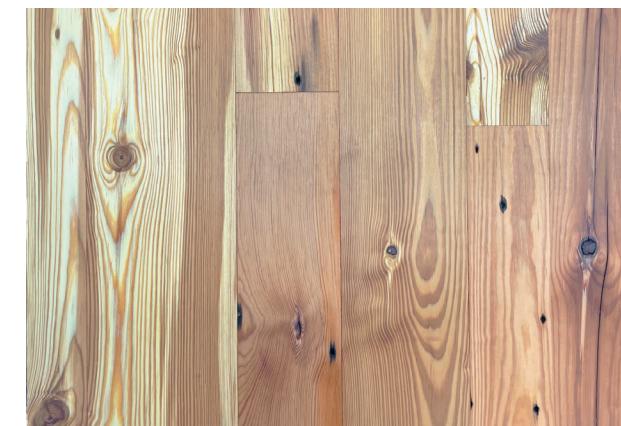

Naked

SKU# 23172310111

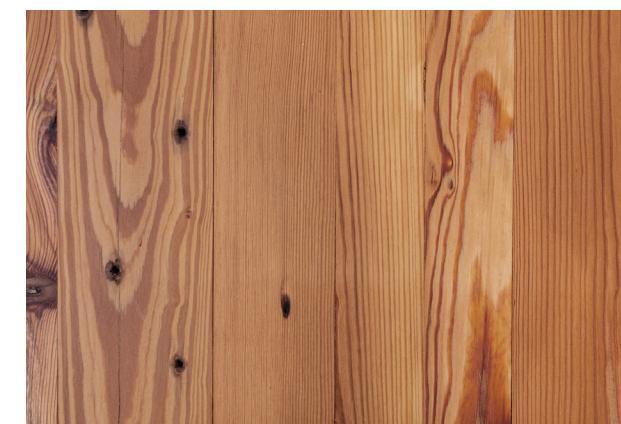

Pure

SKU# 23172310211