


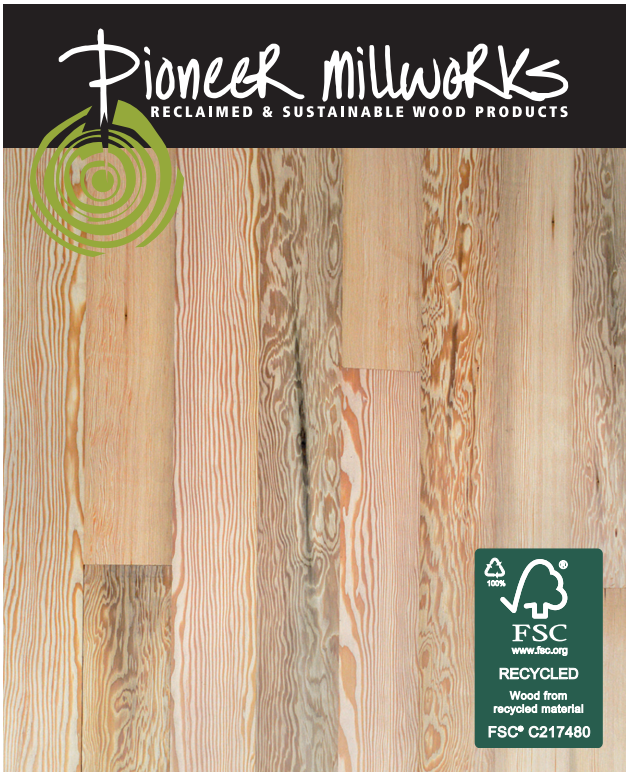


## Clear Vat Stock

### Vinegar Vat Stock Patina & Center Cut: Batch #15091

Salvaged from vinegar vats, this material is primarily made up of Cypress and Douglas fir and is smooth planed, exposing the tight clear grain and the blondish-amber color tones of the wood. Typically, 10–20% of these planks will include some dark staining.

#### Solid (Unfinished)

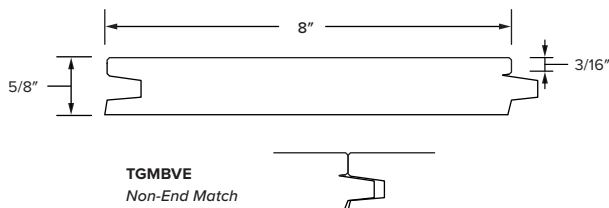

#### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

#### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

#### MATERIALS

**Product:** Clear Vat Stock

**Collection:** Reclaimed

**Species:** Primarily Reclaimed Cypress and Douglas Fir

**Texture:** Smooth Planed

**Source:** Salvaged Vat Stock

**Color:** Tones may range from deep brown to charcoal.

*May include occasional paint, old machine oil stains, and a range of wear marks.*

**Finish:** Unfinished

**Hardness:** 660

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

#### DIMENSIONS & MILLING

**Solid** (Unfinished)

**Thickness:** 5/8"

**Profile**

**TGMBVE**  
(Tongue and Groove  
Micro-Bevel Edge)

**Width:** 3"– 8" nominal

**Length:** 18"– 12' random

#### ADDITIONAL INFORMATION

**Heartwood:** No Restriction

**Grain:** No Restriction

**Knots:** Primarily free of knots.

*Existing knots generally do not exceed 1/2" in diameter.*

**Discoloration:** Typically, 10–20% of these planks will include some dark staining.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

#### CERTIFICATIONS & LEED INFORMATION

**FSC® Claim:** FSC Recycled 100% (GFA-COC-008489)

**MRc4:** Building Product Selection and Procurement  
(FSC Recycled 100%)

#### INSTALLATION RECOMMENDATIONS

**Overage:** Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*



**Unfinished**

SKU# 22321210010



**5% White**

SKU# 22322010010



**Espresso**

SKU# 22322110010



**Faux Shou Sugi Ban**

SKU# 22321210010