


Grandma's Attic Granary

A mix of softwood species, carefully selected for its original patina and partially planed to leave much of the texture intact, Grandma's Attic is a casual and authentic take on reclaimed wood for floors or walls. Once installed, it has a way of looking like it's been there forever.

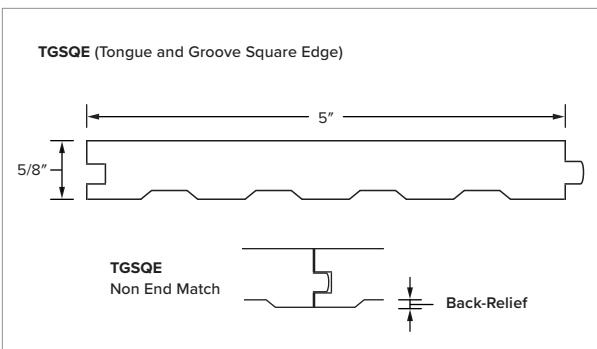

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Grandma's Attic Granary
Collection: Reclaimed
Species: Reclaimed Chestnut
Texture: Skip-Planed / Original Patina
Source: Agricultural/Industrial deconstruction
Color: Tones may range from gold to brown to grey.
Unlimited color variation is inherent to the product.
Finish: Available in Unfinished and Pure.
Hardness: 380
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile + End Match: **TGSQE** (Tongue and Groove Square Edge)
Back-Relief: Included
Thickness: **5/8"**
Width: **5"**
Length: **18"- 12' random**

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.
Material surfaced so that 60% of original patina remains with nearly all boards having some patina. Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.
Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.


Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC® Recycled 100% (GFA-COC-008489)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: **Minimum 10% additional material for on-site grading, trimming and installation factors.**
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.
Environmental conditions consistently outside of these parameters could result in product performance issues.

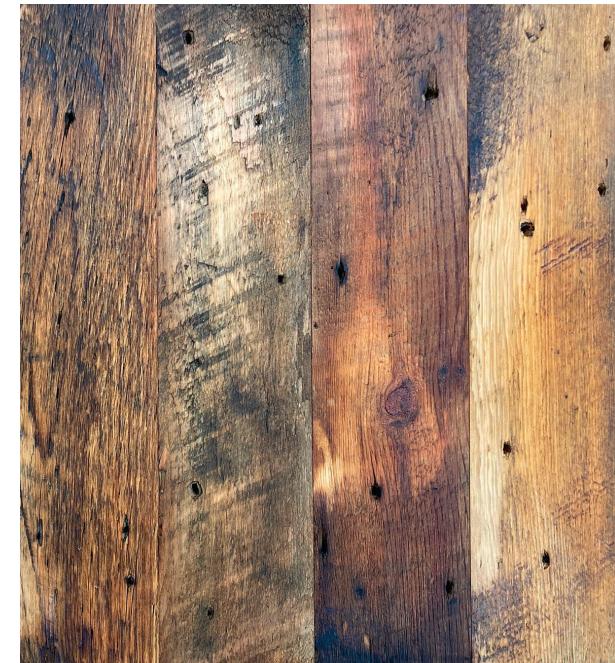

Unfinished

SKU# 13462410010



Pure

SKU# 13462410210