

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
 09 64 30 — Engineered Wood Flooring
 06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks West
 2655 NE Orchard Ave
 McMinnville, OR 97128

MATERIALS

Product: Wire-Brushed Indonesian Reclaimed Teak

Collection: Reclaimed Indonesian Teak

Species: Reclaimed Indonesian Teak

Core: 3-Ply Solid Core Construction 100% Teak

Texture: Rugged Patina

Color: Tones may range from dark tan to chocolate brown.

Unlimited color variation is inherent to the product.

Grade: Rugged Patina

Finish: Unfinished or Available in Pure, White Wash, Donovan, Smoke, Straw, Sand Dune, Black Pepper, and Ebony.

** Shown Unfinished*

Hardness: 1070

(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile + End Match: TGMBE (Tongue and Groove Micro-Bevel Edge)

Wear Layer: 1/8"

Thickness: 9/16"

Width: 3 1/2" or 5 1/4" as specified

wider widths may be available upon request

Length: 2'–7' random

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Mix Credit (GFA-COC-008489)

MRc4: Building Product Selection and Procurement (FSC Recycled 100%)

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter.
Voids up to 2" in diameter may be filled with plugs.

Discoloration: Ferrous staining from previous fasteners may be present. Some original paint remnants may also be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.


Moisture Content: Kiln dried 6–9% prior to milling

INSTALLATION RECOMMENDATIONS

Overage: **Minimum 10%** additional material
for on-site grading, trimming and installation factors.


Climate: As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.

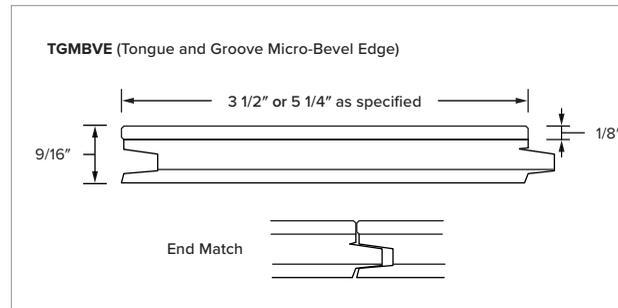

Unfinished

SKU# 24351910011

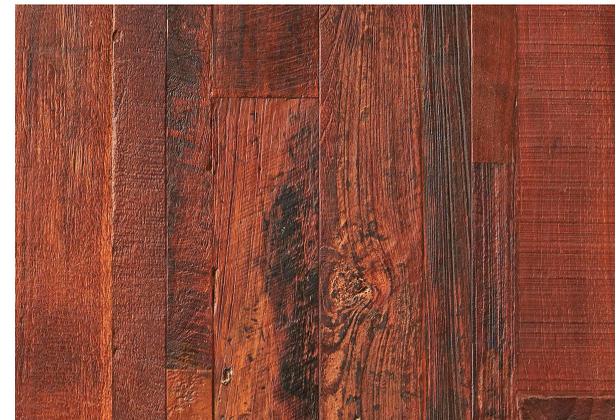

Pure

SKU# 24351910211



Sand Dune

SKU# 24351910611