



**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

- 09 64 29 — Wood strip and plank flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Casual White Oak
Collection: Modern Farmhouse
Species: Domestic White Oak
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed **Grade:** Causal
Source: Sustainably Harvested Forests
Color: Tones may range from cream to tan.
Unlimited color variation is inherent to the product.

Finish: Available in Naked, Pure, 5% White,
Castle Brown, and Espresso

Hardness: 1360

*(Janka Ball Test ASTM D1037-96A, Natural wood products
have no minimum hardness since hardness is a
characteristic of species and cannot be controlled)*

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	6" or 7" as specified (nominal) wider widths may be available upon request	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	5/8"	Profile + End Match:	TGSQE Tongue and Groove Square Edge
Width:	6" or 7" as specified (nominal) wider widths may be available upon request	Length:	18" – 12' random

ADDITIONAL INFORMATION

Heartwood: No limitation on heartwood.

Grain: No limitation on grain orientation.

Knots: No limitation on sound knots.

Voids: In engineered prefinished product
voids up to 1" in diameter will be
filled with a black composite.

*Insect marks, including pinholes,
may also be present on the surface.*

Discoloration: Unlimited mineral staining is permitted.

Checks: Structural checks not affecting the integrity of
the plank, once installed, are allowed and more
prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Mix Credit (GFA-COC-008489)

GREENGUARD Gold Certified

MRC3: Low-Emitting Materials (GREENGUARD Gold)

MRC4: Building Product Selection and Procurement
(FSC Mix Credit)



INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product,
the room temperature should be held
at a consistent range between **60-80° F**
with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these
parameters could result in product performance issues.*

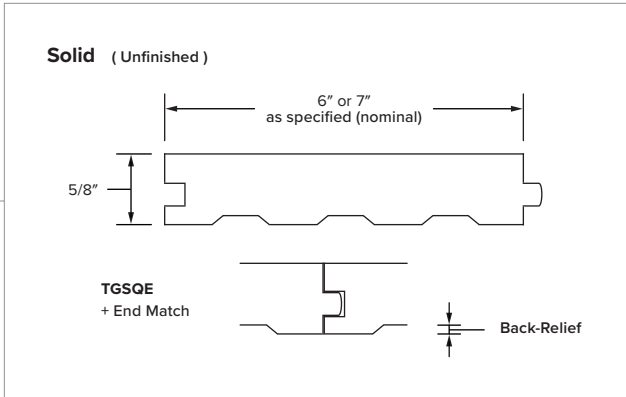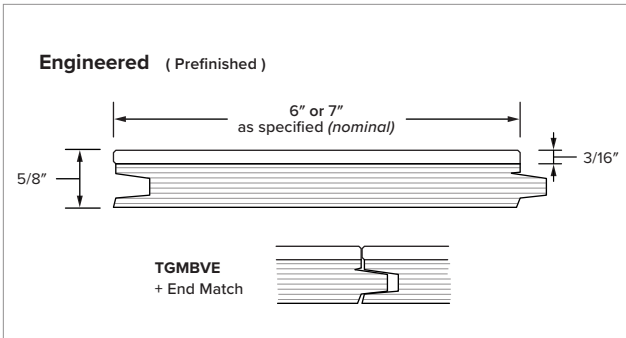



Unfinished

SKU# 22162110010



Naked

SKU# 22162110111



Pure

SKU# 22162110211



5% White

SKU# 22162111011



Espresso

SKU# 22162111111



Castle Brown

SKU# 22162111211