



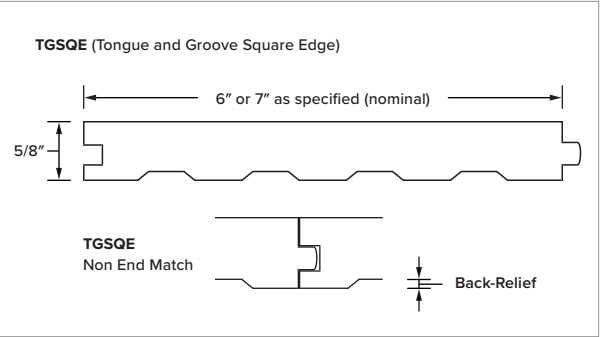

## Casual White Oak

Our Casual White Oak, also known as European Cut US White Oak, makes the most of live sawn boards, preserving sound knots and embracing color variation. Made with FSC® Mix Certified lumber, this grade maximizes the yield of each log and is true to the organic nature of the tree in terms of appearance. Colors range from tan to brown.

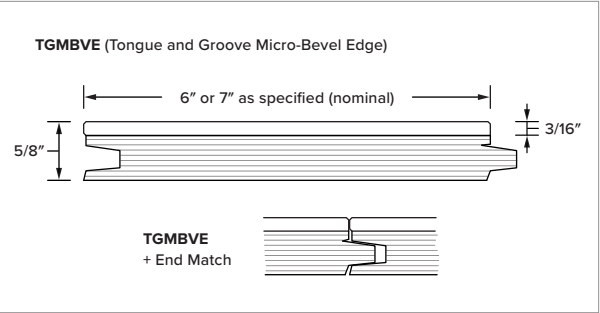

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

### MATERIALS

Product:	Casual White Oak
Collection:	Modern Farmhouse
Species:	Domestic White Oak
Core:	9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture:	Smooth Planed
Source:	Sustainably Harvested Forests
Color:	Tones may range from cream to tan. <i>Unlimited color variation is inherent to the product.</i>
Finish:	Available in Naked, Pure, 5% White, Castle Brown, and Espresso
Hardness:	1360 <i>(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)</i>

### DIMENSIONS & MILLING

Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)	<b>TGSQE</b> (Tongue and Groove Square Edge)
Type:	Engineered (Prefinished)	Solid (Unfinished)
Thickness:	5/8"	5/8"
Width:	6" or 7" as specified (nominal) <i>wider widths may be available upon request</i>	3"– 5" random <i>wider widths may be available upon request</i>
Length:	18"– 12' random	18"– 12' random
Wear Layer:	3/16"	N/A
Core:	1/2"	N/A
Back Relief:	N/A	Included

### ADDITIONAL INFORMATION

Heartwood:	No limitation on heartwood.
Grain:	No limitation on grain orientation.
Knots:	No limitations on sound knots.
Texture:	Surface should generally be 95% clear of saw marks or patina.
Voids:	In engineered prefinished product voids up to 1" in diameter will be filled with a black composite <i>Insect marks, including pinholes, may also be present on the surface.</i>
Discoloration:	Unlimited mineral staining is permitted.
Checks:	Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content:	Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)

### GREENGUARD Gold Certified

MRc3: Low-Emmiting Materials (GREENGUARD Gold)

MRc4: Building Product Selection and Procurement  
*(FSC Mix Credit)*

### INSTALLATION RECOMMENDATIONS

Overage: **Minimum 10%** additional material  
*for on-site grading, trimming and installation factors.*

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*





**Unfinished**

SKU# 22162110010



**Naked**

SKU# 22162110111



**Pure**

SKU# 22162110211



**5% White**

SKU# 22162111011



**Espresso**

SKU# 22162111111



**Castle Brown**

SKU# 22162111211