




## Clean Ash

Sophisticated, warm, and chic this line offers a twist on classically elegant species, matching function with contemporary farmhouse style. Showcasing modern flare with a more uniform appearance than its reclaimed counterpart, this high grade of Ash is sourced from forests which are carefully managed to strict Forest Stewardship Council (FSC®) requirements. Celebrated in natural, fresh-sawn tones, expect consistent hues ranging from cream to light brown, relaxed grain patterns, and as a few small knots. This sustainably harvested wood pairs especially well with our custom eco-friendly finishes for flooring and paneling.

**TGMBVE** (Tongue and Groove Micro-Bevel Edge)

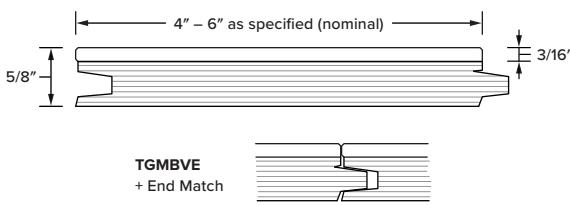

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

### MATERIALS

Product: Clean Ash  
Collection: Modern Farmhouse  
Species: Domestic White Ash  
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
Texture: Smooth Planed  
Grade: Clean  
Source: Sustainably Harvested Forests  
Color: Tones may range from cream to brown.  
*Unlimited color variation is inherent to the product.*  
Finish: Available in Naked, Pure, 5% White, Castle Brown, and Espresso

### HARDNESS

**1320**

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Profile: **TGMBVE** (Tongue and Groove Micro-Bevel Edge)  
+ End Match:  
Thickness: **5/8"**  
Width: **4" – 6" as specified (nominal)**  
Length: **18" – 12' random**  
Wear Layer: **3/16"**  
Core: **1/2"**

### ADDITIONAL INFORMATION

Heartwood: 75% or greater  
Grain: Clear  
Knots: Primarily free of knots.  
*Existing knots generally do not exceed 1/2" diameter.*  
Voids: No voids are permitted.  
Discoloration: Limited mineral staining is permitted.  
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
Moisture Content: Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)  
**Greenguard Gold Certified**  
MRc3: Low-Emmiting Materials (Greenguard Gold)  
MRc4: Building Product Selection and Procurement  
*(FSC Mix Credit)*

### INSTALLATION RECOMMENDATIONS

Overage: **Minimum 10% additional material**  
*for on-site grading, trimming and installation factors.*  
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*



Unfinished

SKU# 22181210010



Naked

SKU# 22181210111



Pure

SKU# 22181210211



5% White

SKU# 22181211011



Espresso

SKU# 22181211111



Castle Brown

SKU# 22181211211