



**CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION**

06 42 00—Wood Paneling

**MANUFACTURER**

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

**MATERIALS**

Product:	Raked™ Standard		
Collection:	Modern Farmhouse		
Species:	Ash, Walnut, or White Oak		
Core:	9-Ply FSC® Certified & TCSA Compliant Birch Plywood		
Texture:	Raked		
Source:	Sustainably Harvested Forests		
Color:	<b>Ash</b>	<b>Walnut</b>	<b>White Oak</b>
	Tones may range from cream to brown.	Tones may range from brown to purple.	Tones may range from cream to tan.

*Unlimited color variation is inherent to the product.*

Finish:	Unfinished		
	<i>Clear Sealer w/ Fire Retardant Additive</i>		
Hardness:	<b>Ash</b>	<b>Walnut</b>	<b>White Oak</b>
	1320	1010	1360

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

**DIMENSIONS & MILLING**

Profile + End Match:	<b>Raked™ TGSQE</b> (Tongue and Groove Square Edge)		
Thickness:	<b>5/8"</b>		
Width:	<b>4 1/2"</b> (standard) <i>Wider widths may be available upon request.</i>		
Length:	<b>18"– 8'</b> random		
Groove Width:	<b>1/4"</b>	Groove Depth:	<b>1/16"</b>
Core:	<b>1/2"</b>		

**ADDITIONAL INFORMATION**


Heartwood:	75% or greater
Grain:	Clear
Knots:	Primarily free of knots. <i>Existing knots generally do not exceed 1/2" in diameter.</i>
Voids:	No voids are permitted.
Discoloration:	Limited mineral staining is permitted.
Checks:	Only minor surface checking is permitted.
Moisture Content:	Kiln dried 6–9% prior to milling.

**CERTIFICATIONS & LEED INFORMATION**

FSC Claim:	<b>Ash</b>	<b>Walnut</b>	<b>White Oak</b>
	FSC Mix Credit (GFA-COC-008489)	None	FSC Mix Credit (GFA-COC-008489)
MRc4:	Building Product Selection and Procurement <i>(FSC Mix Credit)</i>		

**INSTALLATION RECOMMENDATIONS**

Overage:	<b>Minimum 15%</b> additional material <i>For on-site grading, trimming and installation factors.</i>
Climate:	As with any wood flooring product, the room temperature should be held at a consistent range between <b>60-80° F</b> with relative humidity between <b>30-60%</b> . <i>Environmental conditions consistently outside of these parameters could result in product performance issues.</i>

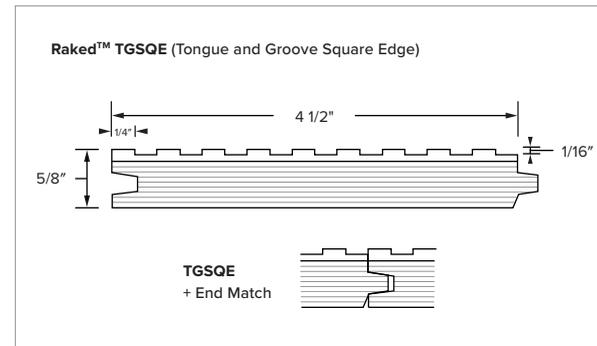

**Raked™ Standard Ash**

SKU# 22261210010



**Raked™ Standard Walnut**

SKU# 22262010010



**Raked™ Standard White Oak**

SKU# 22262110010