




Settlers' Plank Chestnut

American Chestnut is the quintessential reclaimed wood for a romantic floor or a stoked wall. Decimated by a fungal blight in the early 20th century, Chestnut is no longer available as a fresh sawn wood.

We salvage old barns to find this one-of-a-kind wood and skip plane it to maximize its textural and color variation. In addition to saw marks and patina, you are guaranteed to find insect marks, nail holes, and knots.

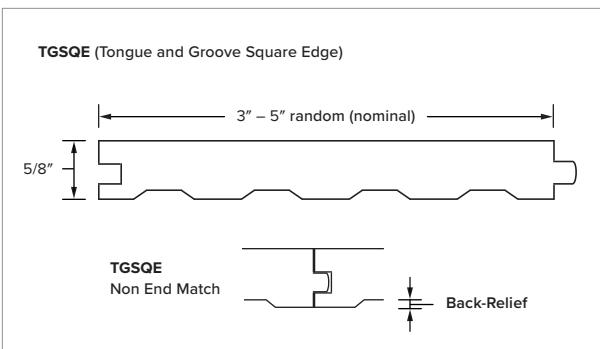

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Settlers' Plank Chestnut
Collection: Reclaimed
Species: Reclaimed Chestnut
Texture: Skip-Planed / Original Patina
Source: Agricultural Deconstruction
Color: Tones may range from gold to brown to grey.
Unlimited color variation is inherent to the product.
Finish: Available in Naked and Pure.
Hardness: 540
(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile + End Match: **TGSQE** (Tongue and Groove Square Edge)
Back-Relief: Included
Thickness: 5/8"
Width: 3"- 5" random (nominal)
Length: 18"- 12' random

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.
Material is surfaced so that approximately 50% of the original black paint remains. Generally, 70% of boards have some Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.
Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6-9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC® Recycled 100% (GFA-COC-008489)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS


Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.



SKU# 13391310010



SKU# 13391310110

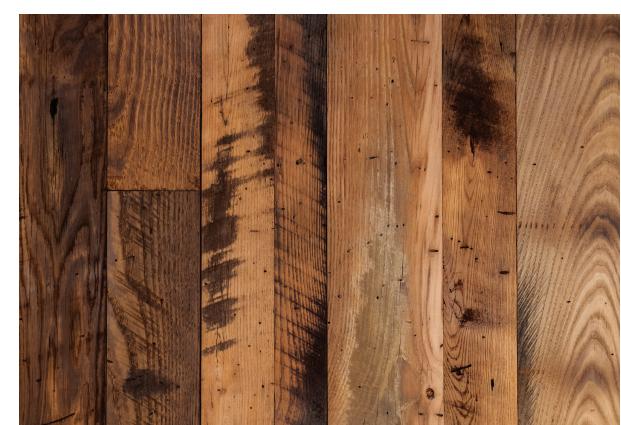

SKU# 13391310210