


Settlers' Plank Oak

Red and White Oak were prolific throughout most of the Eastern US and used in construction across agriculture and industry. We carefully skip plane our Settlers' Plank material so that at least 50% of the overall surface has remnants of original saw marks and patina. Ranging from rough, dark original texture to smooth and bright grain, this grade is durable and rich in character—perfect for accent walls or flooring.

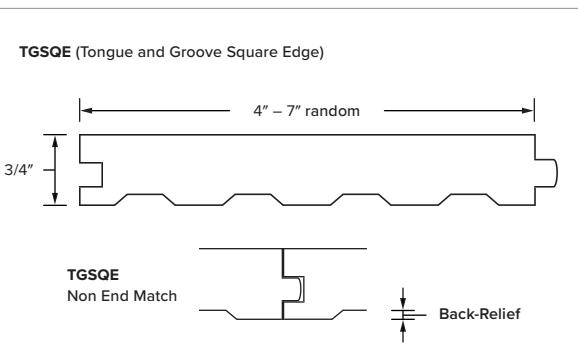

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
06 42 00 — Wood Paneling



MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Settlers' Plank Oak
Collection: Reclaimed
Species: Primarily Reclaimed Oak
**Up to 20% may be other hardwood species*
Texture: Skip-Planed / Original Patina
Source: Agricultural Deconstruction
Color: Tones may range from gold to brown to grey.
Unlimited color variation is inherent to the product.
Finish: Available in Naked and Pure.
Hardness: 1260 - 1360
(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

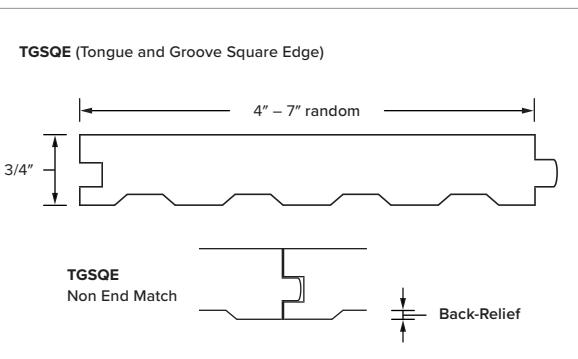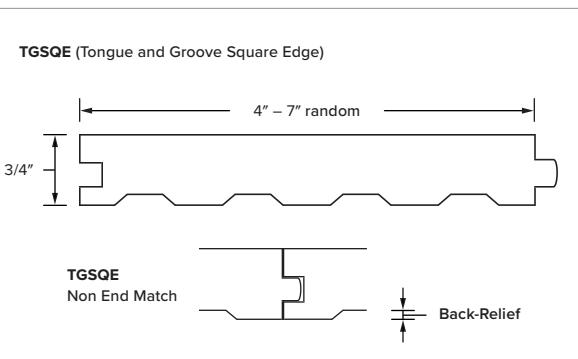

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.
Material is surfaced so that approximately 50% of the original black paint remains. Generally, 70% of boards have some Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.
Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Recycled 100% (GFA-COC-008489)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
For on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.




Unfinished

SKU# 13391810010



Naked

SKU# 13391810110

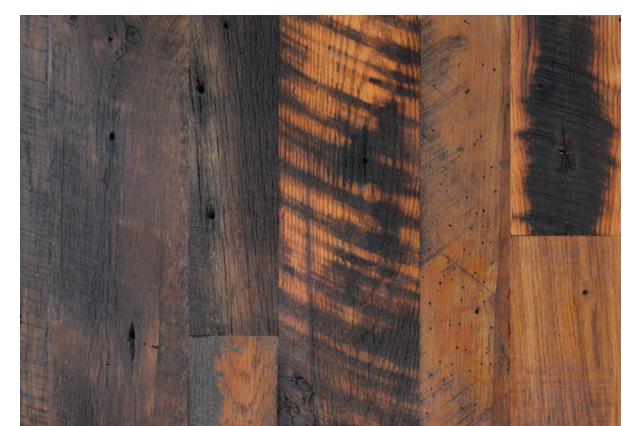

Pure

SKU# 13391810210