


# Accoya® Siding & Shiplap

Pioneer Millworks Accoya Siding and Shiplap is FSC®-certified and cradleto-cradle certified making it a top choice for sustainability and material health. The rot and moisture resistance of this acetylated pine is due to the unique vinegar treatment it is given directly after harvest. This makes it extremely durable, rivaling tropical hardwoods for longevity, and it comes with a 50-year above-ground warranty. Accoya's simple grain structure and few knots take well to our standard color finishes; an additional brushing adds color saturation & adhesion. Also available pre-primed for easy application of paint colors or unfinished to be stained on site.

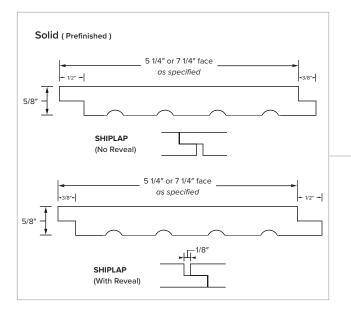

# **CUT AND PASTE SPECIFICATION** INTO APPROPRIATE CSI DIVISION

06 42 00 - Wood Paneling

07 46 23 - Wood Siding

#### **MANUFACTURER**

Pioneer Millworks

2655 NE Orchard Ave McMinnville, OR 97128

## **MATERIALS**

Product: Accoya® Siding & Shiplap

Collection: Siding & Shiplap

Species: Radiata Pine / Acetylized

Texture: Wire-Brushed

Source: Sustainably Harvested Forests

Color: Available prefinished or unfinished, standard and custom colors available.

Unfinished wood tone ranges from off-white to tan.

Unlimited color variation is inherent to the product.

Grade: Select

Finish: Unfinished or prefinished with a exterior sealer as specified (2 coats face, one coat back). \* shown Unfinished

Hardness: 922

(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

## **DIMENSIONS & MILLING**

Solid (Prefinished)

Thickness: 5/8"

Length:

SHIPLAP (No Reveal)

SQUARE-EDGE (S4S)

(Tongue and Groove

SHIPLAP (With Reveal) Profile:

5 1/4" or 7 1/4" face Width:

as specified

**TGBVE** 

6'-16' random Called lenaths available

order will be the longest length in the range)

Bevel Edge) (At least 20% of each

## ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: Infrequent pin knots up to 3/8" in diameter may be present.

Voids: None allowed

Checks: Minimal surface checking may be present.

Moisture Content: Kiln dried less than 10% prior to milling.

## **CERTIFICATIONS & LEED INFORMATION**

FSC® Claim: FSC Mix 70% (GFA-COC-008489)

MRc4: Building Product Selection and Procurement

(FSC Mix 70%)

## **INSTALLATION RECOMMENDATIONS**

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.

