



Accoya® Siding & Shiplap

Pioneer Millworks Accoya Siding and Shiplap is FSC®-certified and cradle-to-cradle certified making it a top choice for sustainability and material health. The rot and moisture resistance of this acetylated pine is due to the unique vinegar treatment it is given directly after harvest. This makes it extremely durable, rivaling tropical hardwoods for longevity, and it comes with a 50-year above-ground warranty. Accoya's simple grain structure and few knots take well to our standard color finishes; an additional brushing adds color saturation & adhesion. Also available pre-primed for easy application of paint colors or unfinished to be stained on site.

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00 — Wood Paneling
07 46 23 — Wood Siding

MANUFACTURER

Pioneer Millworks 2655 NE Orchard Ave McMinnville, OR 97128

MATERIALS

Product: Accoya® Siding & Shiplap

Collection: Siding & Shiplap

Species: Radiata Pine / Acetylated

Texture: Wire-Brushed

Color: Available prefinished or unfinished, standard and custom colors available. Unfinished wood tone ranges from off-white to tan.
Unlimited color variation is inherent to the product.

Grade: Select

Finish: Unfinished or prefinished with a exterior sealer as specified (2 coats face, one coat back).
** Shown Unfinished*

Hardness: **922**
(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profiles: **SHIPLAP** (No Reveal)

SHIPLAP (With Reveal)

SQUARE-EDGE (S4S)

TGBVE (No Reveal)

TGBVE (With Reveal)

Nova Clip

Thickness: **5/8"**

Width: **5 1/4", or 7 1/4" as specified**

Length: **6'– 16' random**
(At least 20% of each order will be the longest length in the range)
Called lengths available

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: Infrequent pin knots up to 3/8" in diameter may be present.

Voids: None allowed

Checks: Minimal surface checking may be present.

Moisture Content: Kiln dried less than 10% prior to milling.

CERTIFICATIONS & LEED INFORMATION





FSC® Claim: FSC Mix 70% (GFA-COC-008489)

MRC4: Building Product Selection and Procurement (FSC Mix 70%)

INSTALLATION RECOMMENDATIONS

Overage: **Minimum 15%** additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.

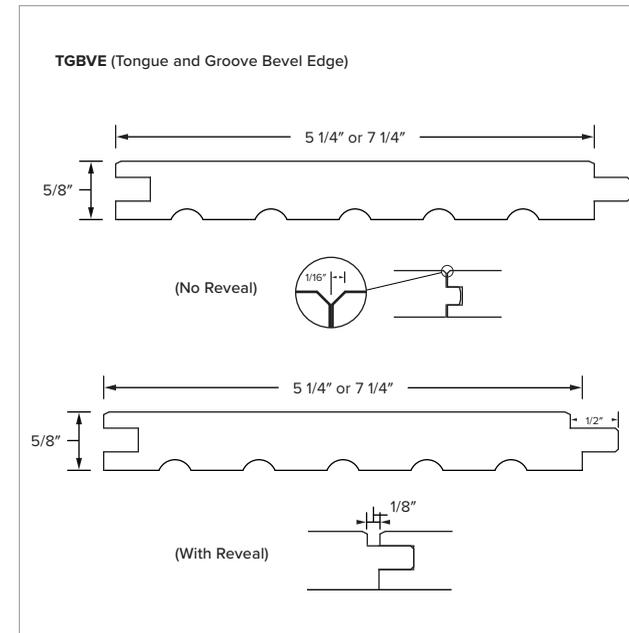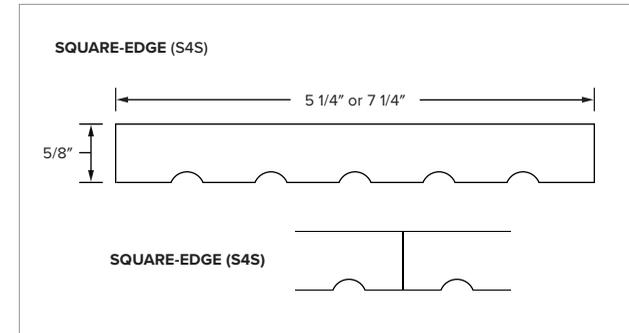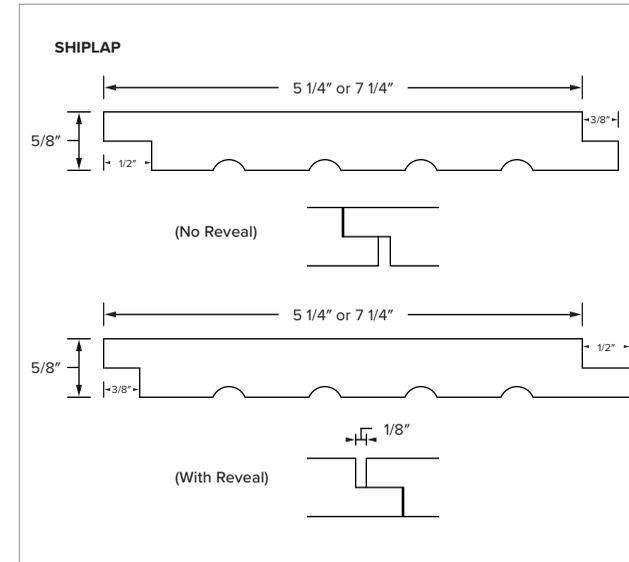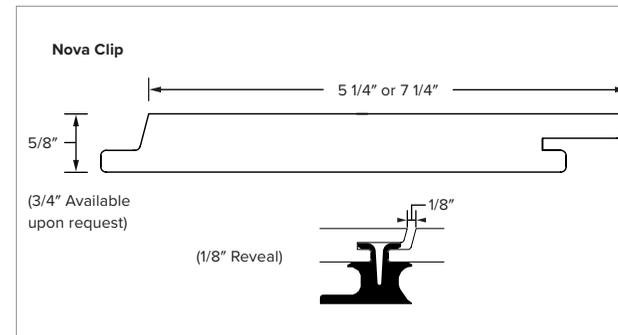



Cloud SKU# 15381112412



Nickel SKU# 15381112612



Clay SKU# 15381116312



Sand SKU# 15381113012



Lowcountry Blue SKU# 15181118812



Unfinished SKU# 15381110012



Scandi SKU# 15381112512



Pebble SKU# 15381112912



Fawn SKU# 15381116212



Tawny SKU# 15381113112



Mountain Laurel SKU# 15181118912



Clear SKU# 15381111412



Pearl SKU# 15181118712



Storm SKU# 15381112812



Grove SKU# 15381116112



Fossil SKU# 15381113412



Poppy SKU# 15181119012



Primed SKU# 15381113712



Black SKU# 15381112712



Hazy SKU# 15381113312



Cocoa SKU# 15381113212



Twilight Blue SKU# 15181119112