

Larch Siding & Shiplap

Pioneer Millworks Larch Siding and Shiplap is PEFC sourced Larch. The signature swirling grain and small tight knots of larch brings a natural finish to vertical applications. The rot resistance of this underutilized species rivals that of Douglas fir, and it is locally grown in the Pacific Northwest which makes it a great option for exterior or interior uses. Pair it with one of our color options which show off the wood grain patterns through hue and tone; it has been brushed which enhances color saturation & adhesion.

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00 — Wood Paneling
07 46 23 — Wood Siding

MANUFACTURER

Pioneer Millworks 2655 NE Orchard Ave McMinnville, OR 97128

MATERIALS

Product: Larch Siding & Shiplap

Collection: Siding & Shiplap

Species: Western Larch (*Larix occidentalis*)

Texture: Wire-Brushed

Source: Sustainably Harvested Forests

Color: Available prefinished standard and custom colors available. Unfinished wood tone ranges from cream to light brown.
Unlimited color variation is inherent to the product.

Grade: Sound Tight Knots (STK)

Finish: Unfinished or prefinished with a exterior sealer as specified (2 coats face, one coat back).
** Shown Unfinished*

Hardness: **830**
(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profiles: **SHIPLAP** (No Reveal)
SHIPLAP (With Reveal)
SQUARE-EDGE (S4S)
TGBVE (No Reveal)
TGBVE (With Reveal)

Thickness: **5/8"**

Width: **5"**

Length: **8'– 16'** random
(At least 20% of each order will be the longest length in the range)
Called lengths available

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Voids: Occasional blown out knots up to 1" diameter may be present.

Checks: Checks allowed so long as material integrity is not adversely affected.

Moisture Content: Kiln dried 12–15% prior to milling.




CERTIFICATIONS & LEED INFORMATION

FSC® Claim: N/A

INSTALLATION RECOMMENDATIONS

Overage: **Minimum 15%** additional material
For on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.

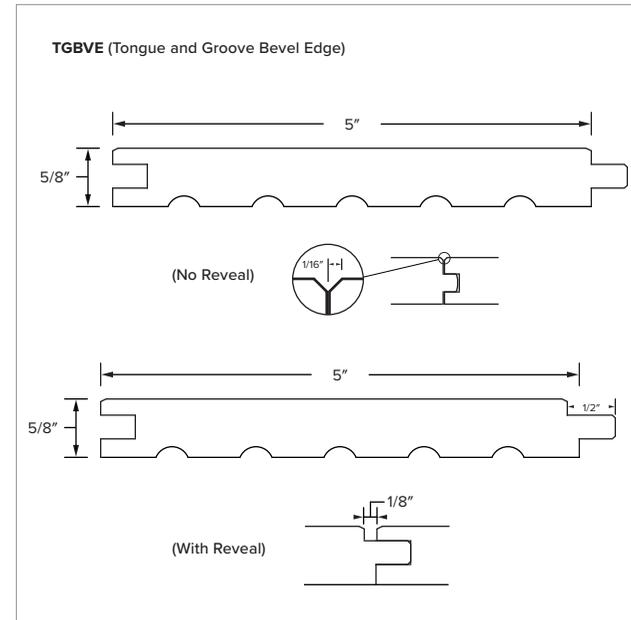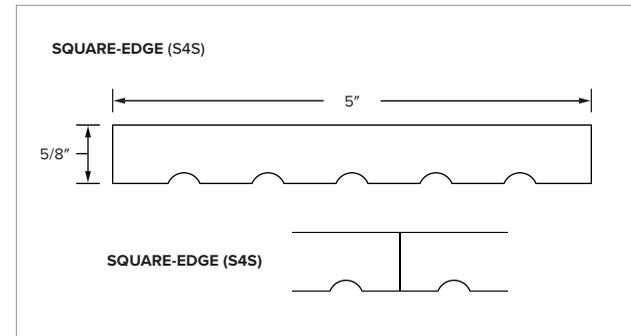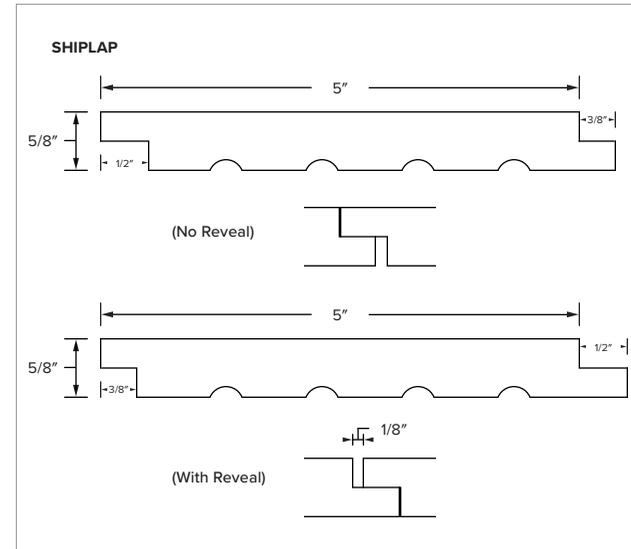



Cloud SKU# 15401712412



Nickel SKU# 15401712612



Clay SKU# 15401716312



Sand SKU# 15401716312



Lowcountry Blue SKU# 15401718812



Pearl SKU# 15401718712



Clear SKU# 15401711412



Salt Flats SKU# 15401714312



Pebble SKU# 15401712912



Fawn SKU# 15401716212



Camel SKU# 15401714512



Poppy SKU# 15401719012



Fossil SKU# 15401713412



Primed SKU# 15401713712



Scandi SKU# 15401712512



Storm SKU# 15401712812



Grove SKU# 15401716112



Tawny SKU# 15401713112



Mountain Laurel SKU# 15401718912



Pinecone SKU# 15401716412



Harbor SKU# 15401714412



Black SKU# 15401712712



Hazy SKU# 15401713312



Cocoa SKU# 15401713212



Twilight Blue SKU# 15401719112