


Heart Pine—Premium Select Mixed Grain



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. The Premium Select Mixed Grain is sorted for dense grain and limited knots and nail holes, while leaving a variety of grain patterns. It's a little more playful than its vertical grain cousin—lending a casual elegance.

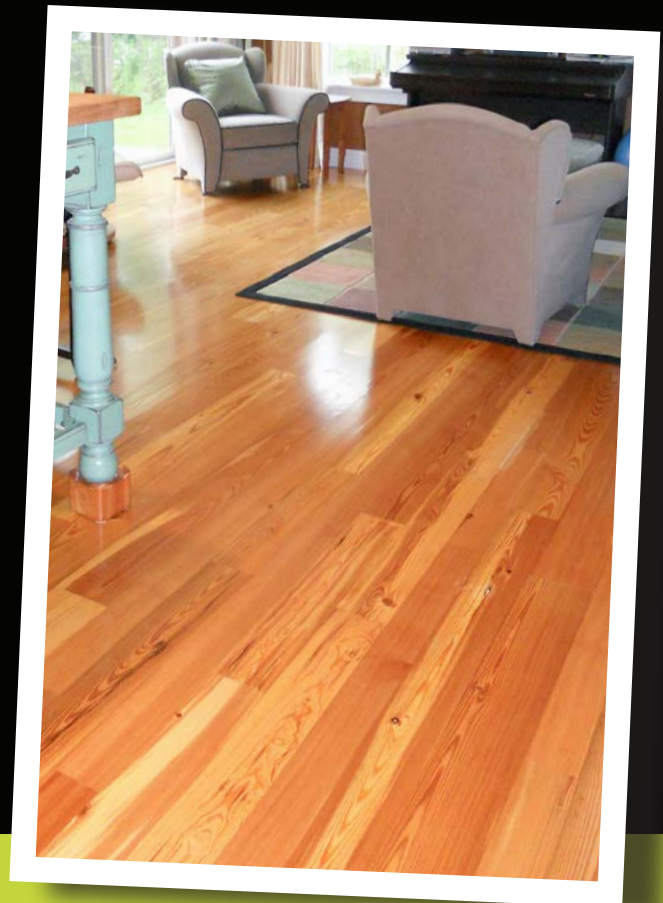

Pioneer Millworks

Heart Pine—Premium Select Mixed Grain

2/2018

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood strip and plank flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

- Product Name:** Premium Select Mixed Grain Heart Pine
- Species/Description:** Domestic Heart Pine, smooth planed
- Source:** Agricultural/Industrial deconstruction
- Color:** Tones may range widely from yellow to amber
Unlimited color variation is inherent to the product
- Grade:** Premium Select Mixed Grain
- Dimensions:**
 - Solid**
TH—3/4"
WD—3" to 8" as specified
LG—18" to 144" random
 - Engineered**
TH—5/8"
WD—4" to 8" as specified
LG—12" to 96" random
- Milling:** Tongue and Groove Square Edge (TGSQE)
- Finish:** Unfinished unless specified otherwise
- Hardness:** 1200
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
- FSC Claim:** (SCS-COC-003998)
 - Solid: Recycled 100%
 - Engineered: FSC Mix 70%

ADDITIONAL INFORMATION

- Heartwood:** 85% or greater heartwood content
Grain: 90% or greater dense grain (8 rings or more per inch)
Knots: Overall appearance should be 90% clear of knots
An average of one knot per 6 LF is permissible
Knots should not exceed 3/4" in diameter
Texture: Surface should be 100% clear of saw marks or patina
Voids: Occasional nail holes up to 3/16" in diameter may be present
Discoloration: Minimal ferrous staining from previous fasteners may be present
Checks: No checking permitted
Moisture Content: Kiln dried 6–9% prior to milling

LEED INFORMATION

- MRc3: Materials Reuse
(materials used for this credit cannot be applied to MRc4 or MRc5)
MRc4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRc3 or MRc7)
MRc5: Regional Materials (call for details)
MRc7: Solid Materials are FSC Recycled 100%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors



The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.