

Mixed Oak—Settlers' Plank



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Red and White Oak were prolific throughout most of the Eastern US and used in construction across agriculture and industry. We carefully skip plane our Settlers' Plank material so that at least 50% of the overall surface has remnants of original saw marks and patina. Ranging from rough, dark original texture to smooth and bright grain, this grade is durable and rich in character—perfect for high traffic areas as it hides scratches, dents, and other wear wonderfully.



Pioneer Millworks Mixed Oak—Settlers' Plank

2/2018

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Settlers' Plank Mixed Oak
2. **Species/Description:** Domestic Red and White Oak with original patina
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from gold to brown to grey.
Unlimited color variation is inherent to the product.
5. **Grade:** Settlers' Plank
6. **Dimensions:**
 - Solid**
TH—3/4"
WD—3" to 10" as specified
LG—18" to 144" random
 - Engineered**
TH—5/8"
WD—4" to 8" as specified
LG—12" to 96" random
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1060–1360
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
 - Solid: Recycled 100%
 - Engineered: FSC Mix 70%

ADDITIONAL INFORMATION

Heartwood: No restriction

Grain: No restriction

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures. Up to 30% of boards may be free of patina, with a mix of rough sawn and planed faces. Overwood of up to 1/8" can be expected.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 1" in diameter. Surface defects from insect marks, including pin holes may be present. Peg or bolt holes are often left open in longer planks.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content


(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

MRc7: Solid Materials are FSC Recycled 100%; Engineered FSC Mix 70%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

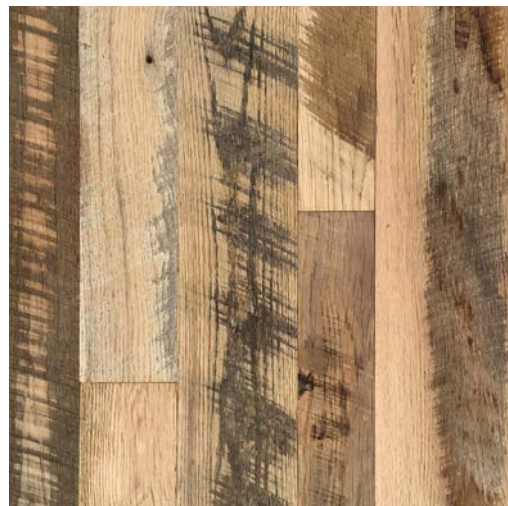

The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.