

Indonesian Teak—Rugged Patina



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS

We've searched the globe to bring you environmentally friendly and ethically sourced teak. This extremely versatile species is reclaimed from non-Burmese sources and is socially responsible—currently, 1% of our teak sales are donated to the Borneo Project in their fight to end the loss of habitat for the indigenous peoples of Indonesia.

Our Patina grade is weathered from nature and time, celebrating the unmatched character of the 18th and 19th century plank. Tight grain makes Teak strong and durable, able to withstand the wear and tear of shoes, animals, and weather. Natural oils make it resistant to rot, insects, and fungi. Thanks to its water resistant nature, consider including the warm tones and texture of Teak in place of tile in places like kitchens and baths. Add a color finish to customize your hue, use it indoors or outdoors, on vertical or horizontal surfaces—the versatility of teak makes it a valuable arsenal in any design tool-kit.



Pioneer Millworks

Indonesian Teak—Rugged Patina

8/2018

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Teak Rugged Patina
2. **Species/Description:** Indonesian Teak with original patina
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from Dark tan to chocolate brown.
Unlimited color variation is inherent to the product.
5. **Grade:** Rugged Patina
6. **Dimensions:**
 - Engineered**
 - TH—9/16"
 - WD—3 1/8" to 8 5/8" as specified
 - LG—24" to 108" random
7. **Milling:** Tongue and Groove Micro Bevel Edge (TGMBVE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1070
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
Engineered: FSC Mix 70%

ADDITIONAL INFORMATION


- Heartwood:** No restriction
- Grain:** No restriction
- Knots:** No limitations on sound knots, surface defects from chipped or open knots may be present.
- Texture:** This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.
Overwood of up to 1/8" can be expected.
- Voids:** Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with oval plugs.
- Discoloration:** Ferrous staining from previous fasteners may be present.
Some original paint remnants may be present.
- Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed
- Moisture Content:** Kiln dried 6–9% prior to milling.

LEED INFORMATION

- MRc3:** Materials Reuse (materials used for this credit cannot be applied to MRc4 or MRc5)
- MRc4:** Recycled Content, 100% Post-Consumer Recycled Content (materials used for this credit cannot be applied to MRc3 or MRc7)
- MRc7:** Engineered Materials FSC Mix 70%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

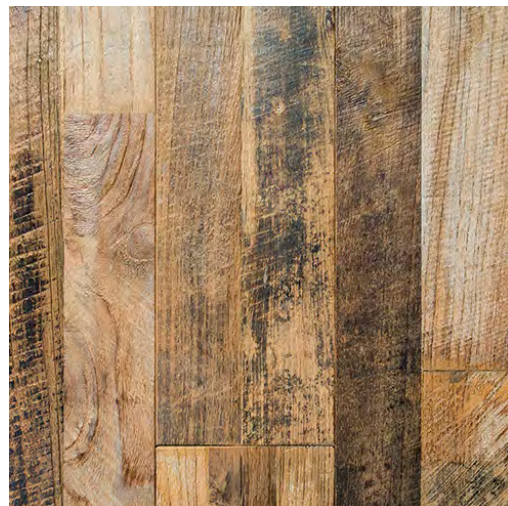

The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.