


# Elm—Premium American Gothic



Our native Elm has been decimated over the last century by Dutch Elm Disease, but we still find Grey and Red Elm when we salvage old barns, making our reclaimed Elm something truly special. With a delicate and distinctive grain, along with cool and creamy colors, this premium grade is sorted to have the fewest knots, nail holes, and insect marks for an ultra clean look.

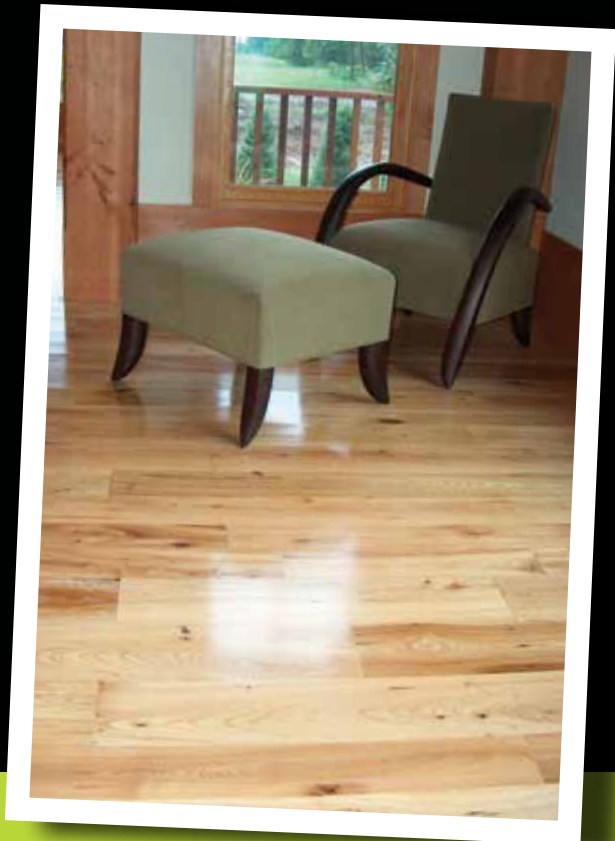

# Pioneer Millworks

## Elm—Premium American Gothic

12/2018

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring  
06 42 00—Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Drive  
Farmington, NY 14425  
Phone: 800-951-9663

Pioneer Millworks  
2609 SE 6th Avenue  
Portland, OR 97202  
Phone: 503-719-4800

### MATERIALS

1. **Product Name:** American Gothic Premium Elm
2. **Species/Description:** Domestic Elm, smooth planed
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from cream to brown.  
Unlimited color variation is inherent to the product.
5. **Grade:** American Gothic
6. **Dimensions:**
  - Solid
  - TH— 3/4"
  - WD— 3" to 10" as specified
  - LG— 18" to 144" random
  - Engineered**
  - TH— 5/8"
  - WD— 4" to 9" as specified
  - LG— 12" to 96" random
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise.
9. **Hardness:** 750  
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
  - Solid:** FSC Recycled 100%
  - Engineered:** FSC Mix

### ADDITIONAL INFORMATION

**Heartwood:** No restriction  
**Grain:** No restriction  
**Knots:** An unlimited number of sound knots up to 1" diameter may be present. Larger sound knots up to 2" diameter may be present but limited to an average of one knot per 4 linear feet of material.  
**Texture:** Surface should generally be 95% clear of saw marks or patina.  
**Voids:** Only occasional nail holes may be present.  
**Discoloration:** Ferrous staining from previous fasteners may be present.  
**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
**Moisture Content:** Kiln dried 6–9% prior to milling.

### LEED INFORMATION

**MRc3:** Materials Reuse  
(materials used for this credit cannot be applied to MRc4 or MRc5)  
**MRc4:** Recycled Content, 100% Post-Consumer Recycled Content  
(materials used for this credit cannot be applied to MRc3 or MRc7)  
**MRc5:** Regional Materials (call for details)  
**MRc7:** Solid Materials are FSC Recycled 100%; Engineered FSC Mix

### RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.