

Shou Sugi Ban Larch Brushed




Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS

Shown in Toasted 2



Traditionally Inspired American Made™. This 18th century technique of preserving wood with fire is refreshed for today's design. Aggressively burning the surface layer of our sustainably harvested Larch, we then wire-brush each plank multiple times to remove the soft char and expose the contrasting grain below. This heavily textured and visually dynamic surface can be left unfinished or can be coated with an exterior grade finish in a selection of cool greys, warm browns, or a pop of color.

Larch is a durable wood exterior option with attractive tones, interesting grain patterns, rot, insect and fire-resistant. Our Shou Sugi Ban Larch Twice-Brushed can just as comfortably clad an interior wall providing a bold statement to any indoor design.

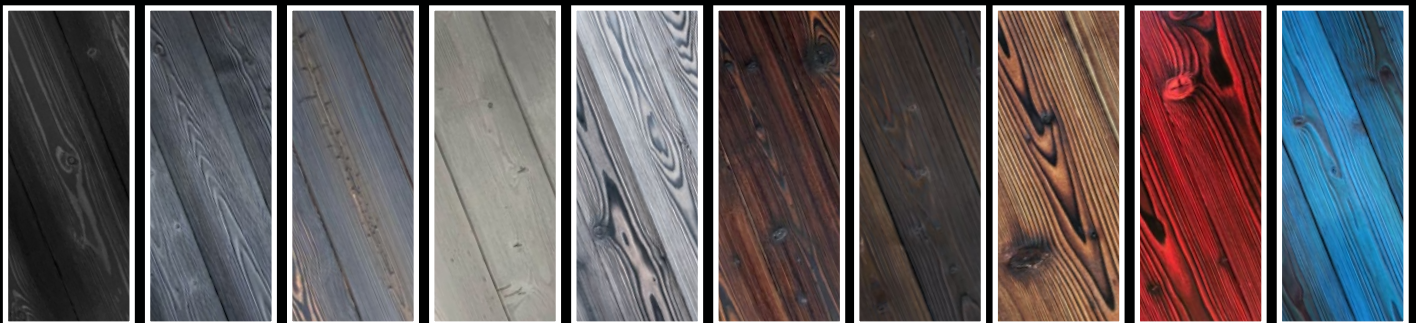

Carbon

Charcoal

Cinder

Smoke

White

Toasted

Scorched

Tiger's Eye

Ember

Cobalt

Pioneer Millworks

Shou Sugi Ban Larch Brushed

4/2023

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00—Wood Paneling
07 46 23—Wood Siding

MANUFACTURER

Pioneer Millworks East
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks West
2655 NE Orchard Ave.
McMinnville, OR 97128
Phone: 503-437-9017

MATERIALS

1. **Product Name:** Shou Sugi Ban Larch Brushed
2. **Species/Description:** Western Larch/Deeply burned, wire-brushed for a textured surface highlighting color contrast and grain.
3. **Source:** Sustainably Harvested Forests.
4. **Color:** Available in 9 standard colors. Latewood growth rings will range from dark brown to black.
5. **Grade:** Sound Tight Knots (STK).
6. **Dimensions:**
 - Solid**
 - TH—5/8"
 - WD—5" face
 - LG—6' to 16' random, called lengths available.
7. **Milling:** Shiplap (no reveal)—other profiles available upon request.
8. **Finish:** Burned, brushed, and coated with an exterior sealer. Back burned to promote stability.
9. **Hardness:** 830
(Janka Ball Test ASTM D1037-96A, natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled).
10. **FSC Claim:** None.

ADDITIONAL INFORMATION

Heartwood: No restriction.

Grain: No restriction.

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: Surface will have a deeply wire-brushed texture.

Voids: Occasional blown out knots up to 1" diameter may be present.

Checks: Checks allowed so long as material integrity is not adversely affected.

Moisture Content: Kiln dried 12–15% prior to milling.

LEED INFORMATION

MRC3: N/A


MRC4: N/A

MRC5: Regional Materials (call for details).

MRC7: N/A

RECOMMENDED COVERAGE

Recommend 10-15% additional material for on-site grading, trimming and installation factors.

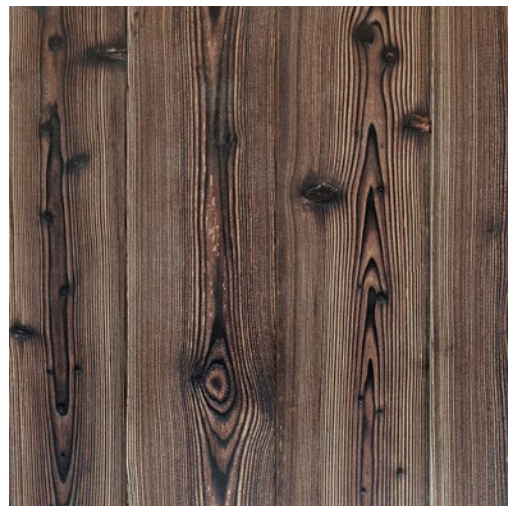

Shown in Tiger's Eye



Information is deemed reliable but subject to change.
All photos for representation only. Additional information
available at our website or call our wood design experts.